

RESIN INJECTION MACHINE FOR SEALING LEAKS.



- Compact and portable machine. Very slight, of 130 Kg. weight . Adjustable injection capacity of 3 to 20l/ min to adjustable working pressure.
- Drawers for its injectors.



- Rubber hose of high features. Easily cleanliness, removal and replacement.
- Resin deposit of 20l of easy removal. With antiparticles filters.



- Electric component box with remote control and two lockable doors.
- 10 m connection electric hose with plug. Reading and visualization of all the working information on a screen visual display. Litres per minute flow, working pressure and stop in bar. Stop- run device with light injection pilot.
- It works at 220v single phase and 24v manoeuvring of high security for all the people who work with it.
- Working injection selector with 2 positions:

- 1/ min flow indicator, working and stop pressure.



- FÁBRICA DE MAQUINARIA -
- MACHINERY FACTORY -

DOSIFICADORES®
garcía fernández

CE

Fábrica y oficinas: Polígono Industrial 2ª fase, 37 y 38.
29130 ALHAURÍN DE LA TORRE (Málaga) -ESPAÑA-.
Tfnos.: (00.34) 952.41.16.70 - 952.41.38.53 Fax: (00.34) 952.41.19.18
e-mail: export@dosificadoresgf.com

TECHNICAL FEATURES:

To inject resin with viscosity till 1.000 cps (centipoises).

Electronically variable flow between 3 and 20 litres/ minutes on a visual screen display.

Selectable injection pressure between 0,5 and 12 bars through electronic control; 0,1 bars precision on a visual screen display.

Injection control remote selector:

- A) "Maintaining Pressure". The machine injects till to its selector pressure then it stops, turning on if the pressure decreases. In this way the machine will be injecting till the leak will not be sealed at its totally.
- B) "Stop pressure". When it reaches the selector pressure, the injection will stop.

Resin deposit of 20 litres with filter and lid. The deposit will be easily removed from the machine for an exhaustive cleanliness.


Electric component box with two lockable doors in order to protect its remote control. The external one is transparent so we could control the machine without opening the door.

220V single- phase working pressure, and 24V maneuvering of high safety for its operator.

Absorbed power: 2000 watts.

Yellow polyester painting at the furnace of high resistance.

Only one maintenance: Cleaning after every single use.

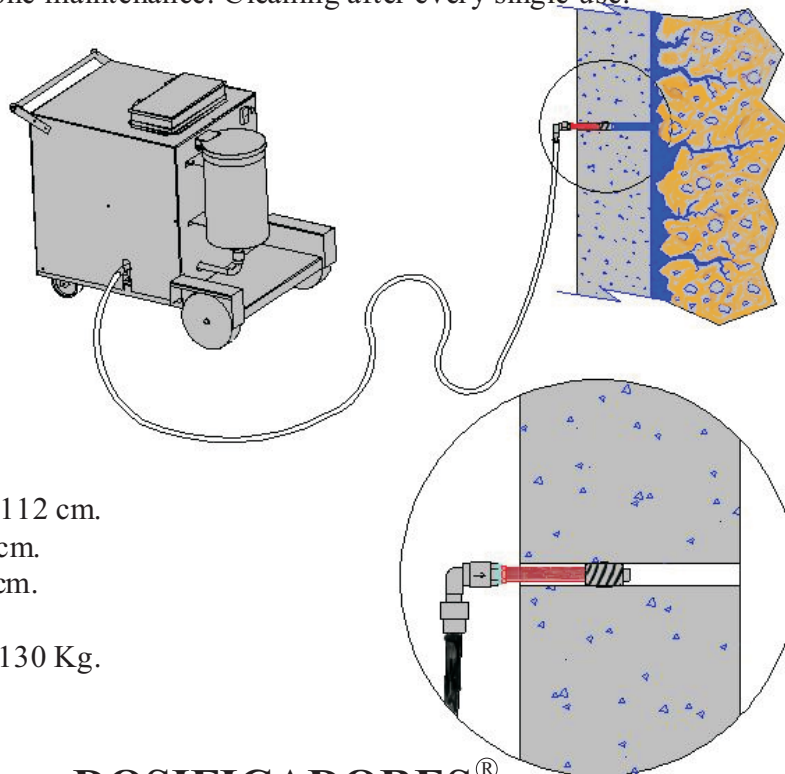

Injector nozzle with antireturn safety valve.
Disposable and cheap.

LENGTH: 112 cm.
WIDE: 77 cm.
HIGH: 92 cm.

WEIGHT: 130 Kg.



- FÁBRICA DE MAQUINARIA -
- MACHINERY FACTORY -

DOSIFICADORES[®]
garcía fernández



Fábrica y oficinas: Polígono Industrial 2ª fase, 37 y 38.
29130 ALHAURÍN DE LA TORRE (Málaga) -ESPAÑA-.
Tfnos.: (00.34) 952.41.16.70 - 952.41.38.53 Fax: (00.34) 952.41.19.18
e-mail: export@dosificadoresgf.com